




1.1

Cod. GC-150-GE-V1-V

230V-50Hz 1,380 rpm 135 l/min@5 bar 6.2 A 64 dB/1

| Air capacity | | FAD Fad @ 5bar | | Motor | Voltage Hz | Noise Level | Duty Cycle | max P. | Size | net Weight |
|---------------------|-------|---------------------|-------|-------|------------|-------------|------------|--------|-------------|------------|
| m ³ /min | l/min | m ³ /min | l/min | kW | 230V 50Hz | db(A) | 50 % | bar | mm | Kg |
| 0.182 | 182 | 0.135 | 135 | 1.1 | | 64 | | 8 | 400x190x290 | 16 |

Air delivery performance

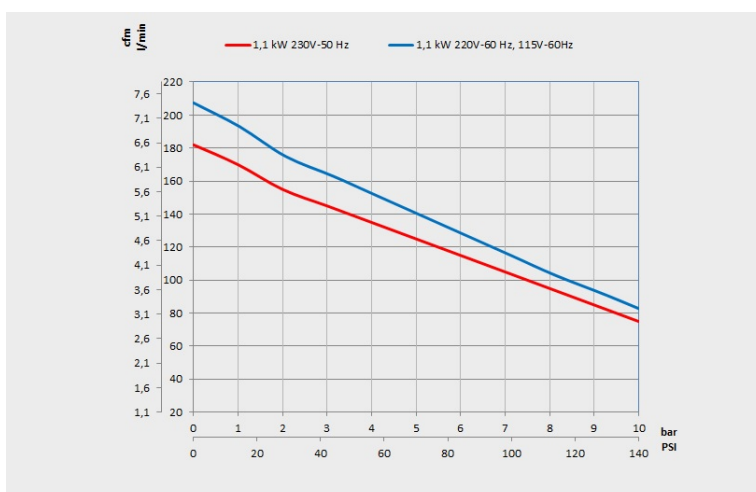

Maintenance kits

| Kit. | Description | Type | Hours |
|-------------|--|----------|-----------|
| TA-FL-001-K | GENESI S ordinary maintenance kit Ordinary maintenance kit for GENESI compressors, versions without dryer. The kit consists of the line filter cartridge (if present) and the pumping element suction filter. Annual replacement of kit components is recommended. Maintenance operations can be performed at a higher frequency if the environment in which the compressor works is particularly dirty. | Ordinary | 1.000h/1y |

| Kit. | Description | Type | Hours |
|-------------|---|----------|-----------|
| MG-GC-011-K | <p>Extra ordinary maintenance kit for GENESI S and M versions</p> <p>The GENESI extraordinary maintenance spare parts kit includes: a suction filter, two elastic rings, O-rings, a line filter cartridge and two complete valve plates. The recommended maintenance intervals for this compressor are 1500 hours / 2 years. Maintenance operations can be performed at a higher frequency if the environment in which the compressor works is particularly dirty.</p> | Ordinary | 1.500h/2y |