












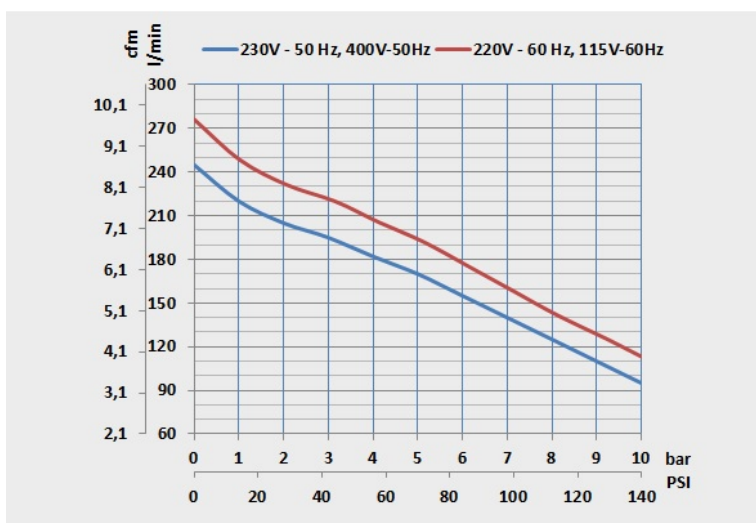
PRIME 2 HD

Cod. GC-1200-PR-HD-V

Dry compressor 2 cylinders, 1,450 rpm, flow rate 125l /min @ 8 bar, maximum absorption 10 A. Quiet and compact. Suitable for intensive cycle applications.

										
Air capacity		FAD @ 8bar		Motor	Voltage Hz	Noise Level	Duty Cycle	max P.	Size	net Weight
m ³ /min	l/min	m ³ /min	l/min	kW	230V 50Hz	db(A)	100 %	bar	mm	Kg
0.24	240	0.125	125	1.5		66		10	519x361x339	26

Air delivery performance



Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
PR-GC-031-K-SCP	<p>PRIME 2</p> <p>Extraordinary maintenance spare parts kit PRIME 1.5 kW (PRIME 2) versions.</p> <p>comprehends:</p> <ul style="list-style-type: none"> • 2 suction filters, code: TA-FL-058-C • 4 O-rings, code: MA-PC018 • 2 piston rings , code: MA-MG00001 • 2 piston guide rings, code: MA-MG00003 • 2 expansion rings for the segments, code: MA-MG00024 • 2 complete valve plates, code: MA-MG-02002P-C-P • 1 non-return valve pads, code: CO-PV-001 <p>The extraordinary maintenance intervals recommended for this compressor are 4000 hours/4 years.</p>	Extraordinary	4.000h/4y