


270/100 TANDEM PRIME M IOT

Cod. PR-OF1200-270-MT3



Oil free air compressor IOT version, 12 cylinders, with an air output of 780 l/min at 5 bar pressure. Tank capacity 270 L, internal surface treatment to protect against corrosion.

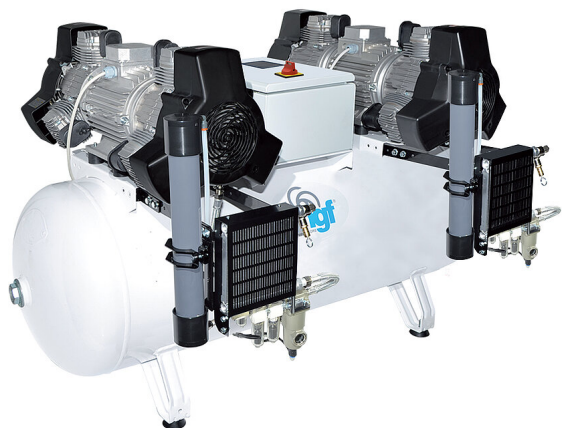








Equipped with a membrane dryer and a series of sensors that detect all operating parameters and any faults in real time. All models also have a touchscreen display and are ready for connection to the MGF Cloud.

MGF offers each compressor in the IOT range in 3 versions:

Eco - configuration with code STDYB

High - configuration with code STDYH

Full - configuration with code STDYF

								
Air Dryer	FAD Fad @ 5bar	Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	Size	net Weight
Yes	m ³ /min 0.78 l/min 780	kW 10	400V 50Hz	l 270	db(A) 75	70 %	mm 1560x1000x1030	Kg 240

Air delivery performance

