



500/150 PRIME S











Cod. PR-OF1800-500-T3

Oil free reciprocating air compressors with a compressed air FAD of 1350 l/min @ 5 bar pressure. Receiver capacity 500 L, with internal surface treatment to protect against corrosion. This compressor is available also in **10 BAR VERSION**, visit the appropriate section!


 Maximum simultaneous use: 18

 Dental Chairs: 20

Medical Device CE 0425

| Air Dryer |  |  |  |  |  |  |  |  |  |  |
|-----------|---|---|---|---|---|---|---|---|---|---|
| | Air capacity | FAD Fad @ 5bar | Motor | Voltage Hz | Receiver | Noise Level | Duty Cycle | max P. | Size | net Weight |
| No | m ³ /min l/min 2.16 2160 | m ³ /min l/min 1.35 1350 | kW 15 | 400V 50Hz | l 500 | db(A) 83 | 80 % | bar 8 | mm 1980x780x1050 | Kg 330 |

Air delivery performance

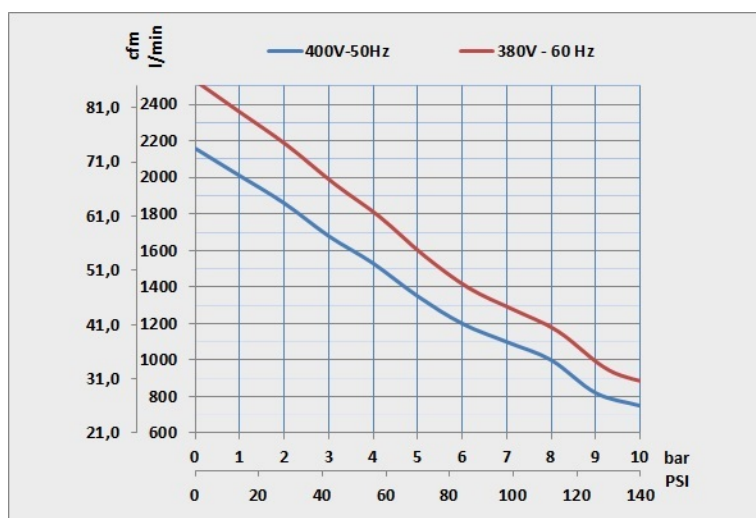

Maintenance kits

| Kit. | Description | Type | Hours |
|------------------|--|---------------|-----------|
| TA-FL-0013-K-SCP | <p>TANDEM PRIME 6+6+6 Version S</p> <p>The ordinary maintenance kit TANDEM PRIME 6+6+6 (500/150 S) without dryer.</p> <p>Comprehends:</p> <ul style="list-style-type: none"> • 18 suction filters, code: TA-FL-058-C • 1 filter cartridge, code: TA-FL-001-C-SM • 1 O-ring, code: TA-FL-001-OR • 6 non-return valve pads, cod: CO-PV-001 <p>Change the filter cartridges every year.</p> | Ordinary | 1.000h/1y |
| PR-GC-038-K-SCP | <p>Kit 500/150 TANDEM PRIME - 6 + 6 + 6</p> <p>Extraordinary maintenance kit for oil-free compressors TANDEM PRIME 5+5+5 Kw versions (TANDEM PRIME 6+6+6).</p> <p>Composed of:</p> <ul style="list-style-type: none"> • 18 suction filters, code: TA-FL-058-C • 18 O-rings, code: MA-PC018 • 18 piston rings , code: MA-MG00001 • 18 piston guide rings, code: MA-MG00003 • 18 expansion rings for the segments, code: MA-MG00024 • 18 complete valve plates, code: MA-MG-02002P-C-P • 6 non-return valve pads, cod: CO-PV-001 | Extraordinary | 4.000h/4y |