










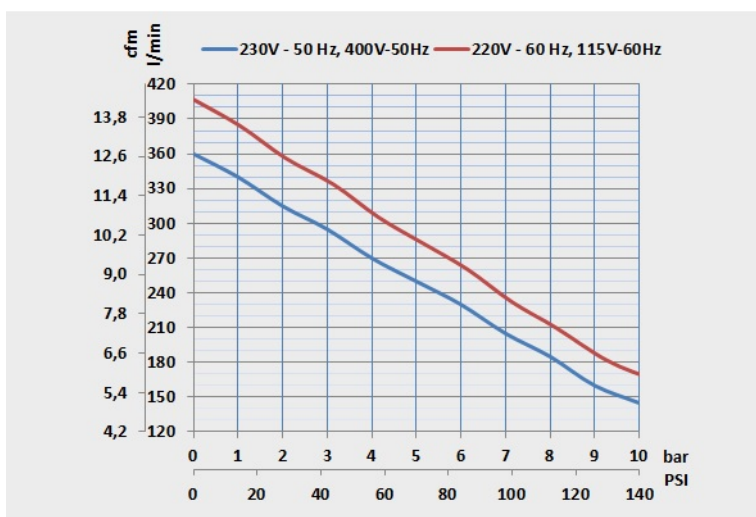
PRIME 3 HD

Cod. GC-1300-PR-HD-V

Three-cylinder dry compressor, 1,450 rpm, flow rate 190 l /min @ 8 bar, maximum absorption 14,3 A

										
Air capacity		FAD @ 8bar		Motor	Voltage Hz	Noise Level	Duty Cycle	max P.	Size	net Weight
m ³ /min	l/min	m ³ /min	l/min	kW		db(A)		bar	mm	Kg
0.36	360	0.19	190	2.2	230V 50Hz	66	100 %	10	527x336x350	28.5

Air delivery performance



Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
PR-GC-032-K-SCP	<p>PRIME 3</p> <p>Extraordinary maintenance spare parts kit for PRIME 2.2 kW (PRIME 3) versions.</p> <p>comprehends:</p> <ul style="list-style-type: none"> • 3 suction filters, code: TA-FL-058-C • 6 O-rings, code: MA-PC018 • 3 piston rings , code: MA-MG00001 • 3 piston guide rings, code: MA-MG00003 • 3 expansion rings for the segments, code: MA-MG00024 • 3 complete valve plates, code: MA-MG-02002P-C-P • 1 non-return valve pads, code: CO-PV-001 <p>The recommended maintenance intervals for this compressor are 4000 hours/4 years.</p>	Extraordinary	4.000h/4y