

## CS 30/15 PRIME S

**Cod. PR-CS200-040**

Oil free reciprocating air compressors with soundproof cabinet, 2 cylinders, with a compressed air FAD of 170 l/min @ 5 bar pressure. Receiver capacity 40 L, with internal surface treatment to protect against corrosion. The cab versions are equipped with wheels to facilitate positioning and handling. This compressor is available also in [10 BAR VERSION](#), visit the appropriate section


 Maximum simultaneous use: 2

 Dental Chairs: 3

Medical Device CE 0425

Cod.	Air Dryer	Air capacity	FAD FAD @ 5bar	Motor	Voltage Hz	Receiver	Noise Level	RPM	Duty Cycle	max P.	Size	net Weigh
CS 30/15 PRIME S PR-CS200-040	No	m <sup>3</sup> /minl/min 0.23 230	m <sup>3</sup> /min l/min 0.17 170	kW 1.5	230V 50Hz	l 40	db(A) 53	1360	70 %	bar 7	mm 490x720x890	Kg 94
CS 30/15 PRIME S PR-CS200-040-400	No	m <sup>3</sup> /minl/min 0.23 230	m <sup>3</sup> /min l/min 0.17 170	kW 1.5	400V 50Hz	l 40	db(A) 53	1470	70 %	bar 7	mm 490x720x890	Kg 94
CS 30/15 PRIME S 220V - 60Hz PR-CS200-040-6	Yes	m <sup>3</sup> /minl/min 0.28 280	m <sup>3</sup> /min l/min 0.185 185	kW 1.5	220V 60Hz	l 40	db(A) 53	1760	70 %	bar 7	mm 490x720x890	Kg 94
CS 30/15 PRIME S 110V - 60Hz PR-CS200-040-110-UL	Yes	m <sup>3</sup> /minl/min 0.28 280	m <sup>3</sup> /min l/min 0.185 185	kW 1.5	110V 60Hz	l 40	db(A) 53	1760	70 %	bar 7	mm 490x720x890	Kg 94

## Air delivery performance

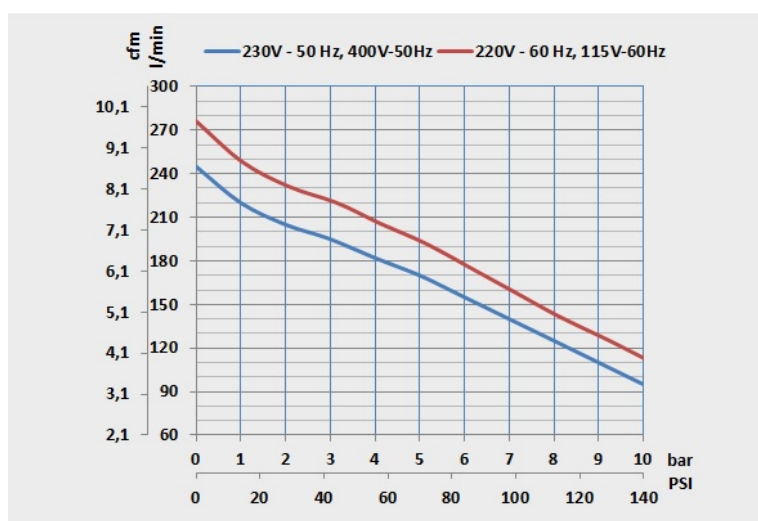

## Maintenance kits

Kit.	Description	Type	Hours
TA-FL-001-K-SCP	<p><b>PRIME S filter cartridges kit</b></p> <p>Cartridge replacement kit for ordinary maintenance PURE AIR PRIME 1-2-3 S versions (without dryer).</p> <p>Comprehends:</p> <ul style="list-style-type: none"> <li>• 3 suction filters, code: TA-FL-058-C</li> <li>• 1 5 micron filter cartridge, code: TA-FL-001-C-SM</li> <li>• 1 o-rings for filters, cod. TA-FL-001-OR</li> <li>• 1 non-return valve pads, code: CO-PV-001</li> </ul> <p>Replace the filtration cartridges annually.</p>	Ordinary	1.000h/1y
PR-GC-031-K-SCP	<p><b>PRIME 2</b></p> <p>Extraordinary maintenance spare parts kit PRIME 1.5 kW (PRIME 2) versions.</p> <p>comprehends:</p> <ul style="list-style-type: none"> <li>• 2 suction filters, code: TA-FL-058-C</li> <li>• 4 O-rings, code: MA-PC018</li> <li>• 2 piston rings , code: MA-MG00001</li> <li>• 2 piston guide rings, code: MA-MG00003</li> <li>• 2 expansion rings for the segments, code: MA-MG00024</li> <li>• 2 complete valve plates, code: MA-MG-02002P-C-P</li> <li>• 1 non-return valve pads, code: CO-PV-001</li> </ul> <p>The extraordinary maintenance intervals recommended for this compressor are 4000 hours/4 years.</p>	Extraordinary	4.000h/4y