















CS 100/50 TANDEM PRIME M

Cod. PR-CS600-090-MT


Oil free reciprocating air compressors with soundproof cabinet, compressed air FAD of 500 l/min @ 5 bar pressure. Receiver capacity 90 L, with internal surface treatment to protect against corrosion. Complete with membrane dryer to ensure maximum air purity. This compressor is available also in [10 BAR VERSION](#), visit the appropriate section!

-  Maximum simultaneous use: 6
-  Dental Chairs: 8

Medical Device CE 0425

Cod.	Air Dryer	 Air capacity	 FAD Fad @ 5bar	 Motor	 Voltage Hz	 Receiver	 Noise Level	 Duty Cycle	 max P.	 Size	 net Weight
CS 100/50 TANDEM PRIME M PR-CS600-090-MT	Yes	m ³ /min/l/min 0.72 720	m ³ /min l/min 0.5 500	kW 4.4	230V 50Hz	l 90	db(A) 56	70 %	bar 7	mm 725X1245X1020	Kg 220
CS 100/50 TANDEM PRIME M PR-CS600-090-MT3	Yes	m ³ /min/l/min 0.72 720	m ³ /min l/min 0.5 500	kW 4.4	400V 50/60Hz	l 90	db(A) 56	70 %	bar 7	mm 725X1245X1020	Kg 220

Air delivery performance

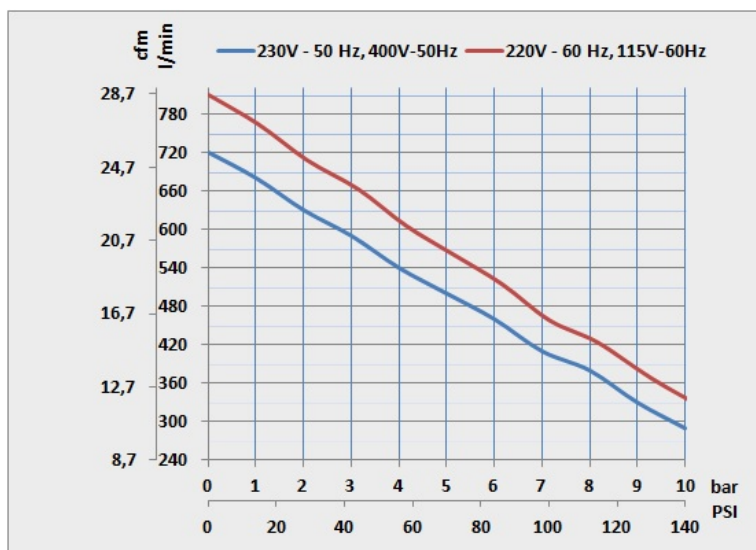

Maintenance kits

Kit.	Description	Type	Hours
TA-FL-0261-K-SCP	<p>TANDEM PRIME 2 + 2-3 + 3 M kit</p> <p>Ordinary maintenance replacement kit for TANDEM PRIME 2+2, 3+3 M versions (100/30 TANDEM PRIME M, 100/50 TANDEM PRIME M).</p> <ul style="list-style-type: none"> • 6 suction filters, code: TA-FL-058-C • 1 non-return valve pads, code: CO-PV-001 • 2 5 micron filter cartridges, code: TA-FL-001-C-SM • 2 0.01 micron filter cartridges, code: TA-FL-024-C2-SM • 4 o-rings for filters, cod. TA-FL-001-OR • 2 radiator filter cartridges, code: TA-FL-002-C • 2 0.01 micron filter cartridges, code: TA-FL-076-C • 2 AMG150 water separator cartridges, code: TA-FL-074-C • 4 o-rings for filters, cod. TA-FL-075-OR <p>Replace the filtration cartridges every 2 years.</p>	Ordinary	1.000h/1y
PR-GC-034-K-SCP	<p>TANDEM PRIME 3+3 AND PRIME 6</p> <p>Spare parts kit for extraordinary maintenance of the PRIME 3+3 & PRIME 6 versions.</p> <p>comprehends:</p> <ul style="list-style-type: none"> • 6 suction filters, code: TA-FL-058-C • 12 O-rings, code: MA-PC018 • 6 piston rings , code: MA-MG00001 • 6 piston guide rings, code: MA-MG00003 • 6 expansion rings for the segments, code: MA-MG00024 • 6 complete valve plates, code: MA-MG-02002P-C-P • 2 non-return valve pads, cod: CO-PV-001 <p>The recommended maintenance intervals for this compressor are 4000 hours/4 years.</p>	Extraordinary	4.000h/4y