


PRIME 6 HD - 5 kW 400 V-50 / 60Hz

Cod. GC-1600-PR-3-V

Dry compressor 6 cylinders, 1,450 rpm, flow rate 450 l/min @ 5 bar, maximum absorption 20 A. Quiet and compact.

Air capacity		FAD @ max p		Motor	Voltage Hz	Noise Level	Duty Cycle	max P.	Size	net Weight
m ³ /min	l/min	m ³ /min	l/min	kW	400V 50/60Hz	db(A)	100 %	bar	mm	Kg
0.72	720	0.45	450	5		76		10	804x336x350	60

Air delivery performance

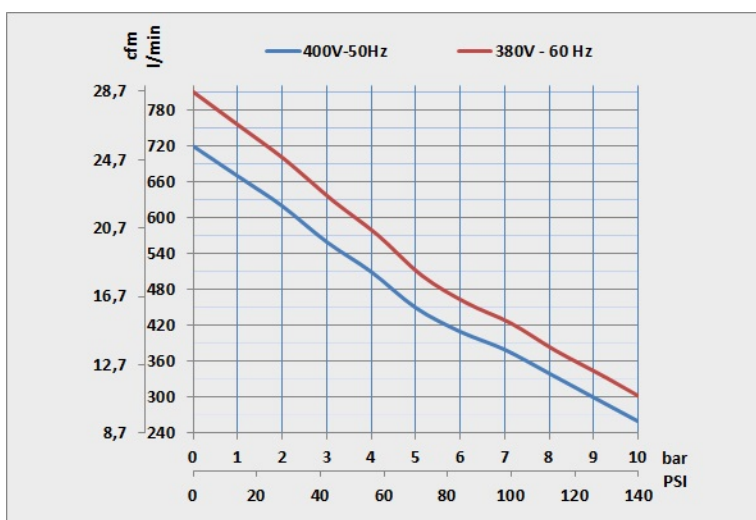

Maintenance kits

Kit.	Description	Type	Hours
TA-FL-0012-K-SCP	<p>PRIME 6 S and TANDEM 2 + 2, 3 + 3 S kit</p> <p>Replacement kit for routine maintenance 200/50 PRIME S and TANDEM 2+2, 3+3 S versions (cartridges+suction filter).</p> <p>Comprehends:</p> <ul style="list-style-type: none"> • 6 suction filters, code: TA-FL-058-C • 2 non-return valve pads, cod: CO-PV-001 • 1 o-ring for filters, cod. TA-FL-085-OR • 1 filter cartridge, code: TA-FL-001-C-SM <p>Replace the filtration cartridges annually.</p>	Ordinary	1.000h/1y

Kit.	Description	Type	Hours
PR-GC-034-K-SCP	<p>TANDEM PRIME 3+3 AND PRIME 6</p> <p>Spare parts kit for extraordinary maintenance of the PRIME 3+3 & PRIME 6 versions.</p> <p>comprehends:</p> <ul style="list-style-type: none"> • 6 suction filters, code: TA-FL-058-C • 12 O-rings, code: MA-PC018 • 6 piston rings , code: MA-MG00001 • 6 piston guide rings, code: MA-MG00003 • 6 expansion rings for the segments, code: MA-MG00024 • 6 complete valve plates, code: MA-MG-02002P-C-P • 2 non-return valve pads, cod: CO-PV-001 <p>The recommended maintenance intervals for this compressor are 4000 hours/4 years.</p>	Extraordinary	4.000h/4y