













## MOBILE 25/25 PRIME S


**Cod. PR-OF300-025-M, PR-OF300-025-HD**

Oil free compressor, excellent portability thank to the high handle and air tyres. Very low noise level, inlet flow rate 360 lt/min, tank capacity 25 l.

This model is available in standard version and HD version (for heavy duty cycle and with 10 bar maximum pressure).

Cod.	 <b>Air capacity</b>	 <b>FAD</b> Fad @ 5bar	 <b>Motor</b>	 <b>Voltage</b> Hz	 <b>Receiver</b>	 <b>Noise Level</b>	 <b>Duty Cycle</b>	 <b>max P.</b>	 <b>Size</b>	 <b>net Weight</b>
MOBILE 25/25 PRIME S PR-OF300-025-M	m <sup>3</sup> /min l/min 0.36 360	m <sup>3</sup> /min l/min 0.225 225	kW 2.2	230V 50Hz	l 25	db(A) 66	70 %	bar 8	mm 510x600x830	Kg 49
MOBILE 25/25 PRIME S PR-OF300-025-M-HD	m <sup>3</sup> /min l/min 0.36 360	m <sup>3</sup> /min l/min 0.225 225	kW 2.2	230V 50Hz	l 25	db(A) 69	100 %	bar 10	mm 510x600x830	Kg 49

## Air delivery performance

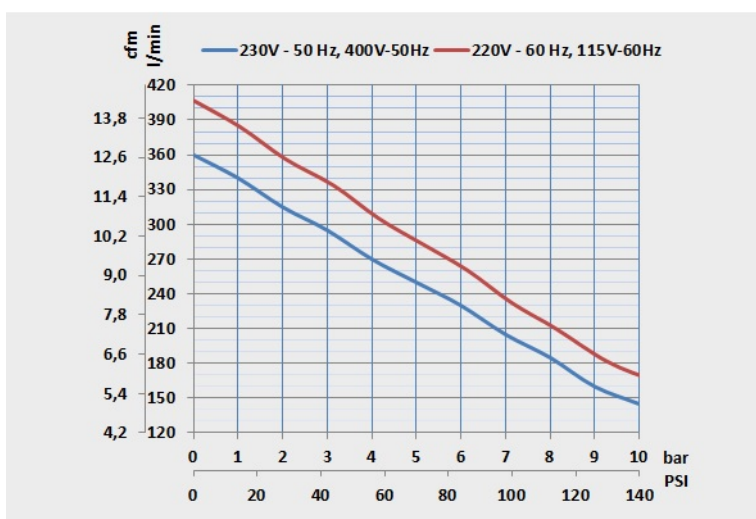

## Images

