














MINI SILENT 1

Cod. S-OF100-003-MS1

Super silent twin cylinder dry compressor, dB 50 / 1m, 1400 rpm, maximum pressure 7 bar and flow rate 50 l / min at 5 bar. With 3 liter stainless steel tank. The 2020 version improves on the previous one for greater silence, less vibrations and for the wide choice of configurations (filtration, drying, portability).

									
Air capacity	FAD Fad @ 5bar	Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.	Size	net Weight
m³/min l/min 0.09 90	m³/min l/min 0.05 50	kW 0.7	220V 50/60Hz	l 3 Inox	db(A) 53	50 %	bar 7	mm 260x350x400	Kg 29

Air delivery performance

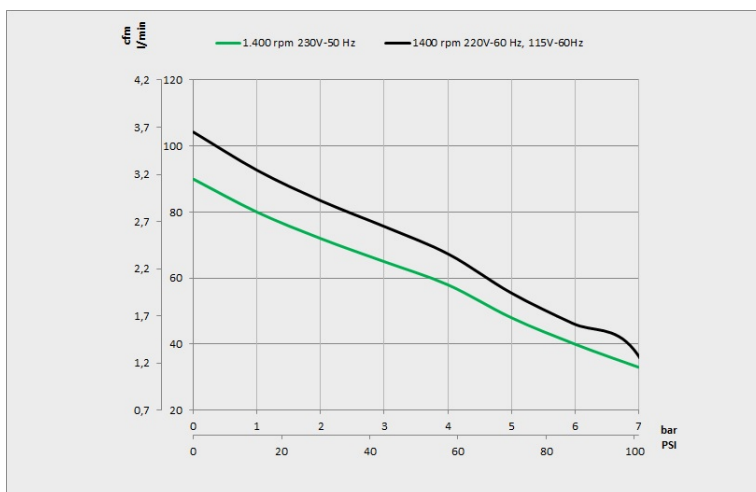

Maintenance kits

Kit.	Description	Type	Hours
MH-3244-90602	AT Kit complete maintenance Kit complete maintenance: cylinder, valve plate, valve flapper, upper valve flapper, down valve flapper, piston ring, cylinder O-ring, valve plate o-ring	Extraordinary	1.500h/2y