














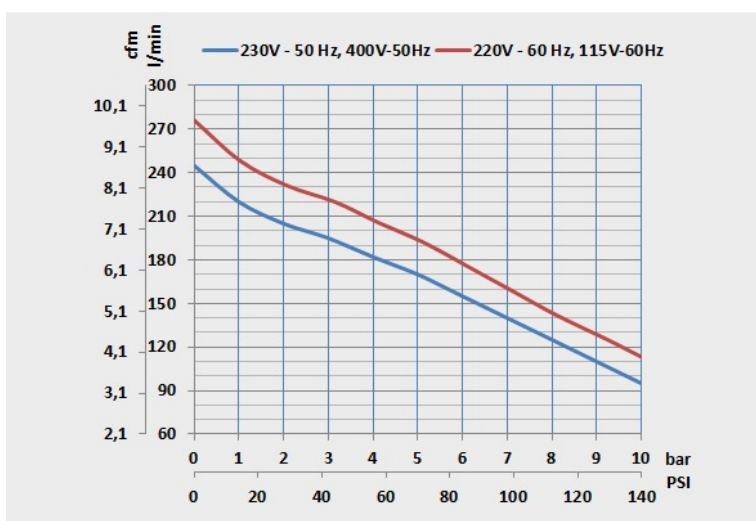
MOBILE 25/15 PRIME S

Cod. PR-OF200-025-M

Compressore a secco, eccellente trasportabilità. pressione massima 8 bar e serbatoio da 25 litri.

Cod.	 Air capacity	 FAD F _{ad} @ 5bar	 Motor	 Voltage Hz	 Receiver	 Noise Level	 RPM	 Duty Cycle	 max P.	 Size	 net Weight
MOBILE 25/15 PRIME S PR-OF200-025-M	m ³ /min l/min 0.24 240	m ³ /min l/min 0.17 170	kW 1.5	230V 50Hz	l 25	db(A) 66	1400	70 %	bar 8	mm 510x600x830	Kg 42
MOBILE 25/15 PRIME S PR-OF200-025-HD	m ³ /min l/min 0.24 240	m ³ /min l/min 0.17 170	kW 1.5	230V 50Hz	l 25	db(A) 69	1400	100 %	bar 10	mm 510x600x830	Kg 42

Air delivery performance



Images

