














MOBILE 25/25 PRIME S

Cod. PR-OF300-025-M

Oil free compressor, excellent portability thank to the high handle and air tyres. Very low noise level, inlet flow rate 360 lt/min, tank capacity 25 l.

Cod.	 Air capacity	 FAD Fad @ 5bar	 Motor	 Voltage Hz	 Receiver	 Noise Level	 Duty Cycle	 max P.	 Size	 net Weight
MOBILE 25/25 PRIME S PR-OF300-025-M	m ³ /min l/min 0.36 360	m ³ /min l/min 0.225 225	kW 2.2	230V 50Hz	l 25	db(A) 66	70 %	bar 8	mm 510x600x830	Kg 49
MOBILE 25/25 PRIME S PR-OF300-025-M-HD	m ³ /min l/min 0.36 360	m ³ /min l/min 0.225 225	kW 2.2	230V 50Hz	l 25	db(A) 69	100 %	bar 10	mm 510x600x830	Kg 49

Air delivery performance

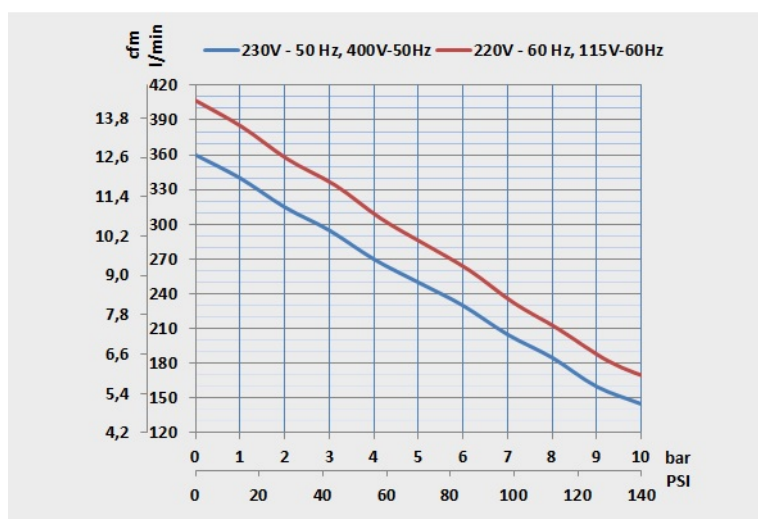

Images

