










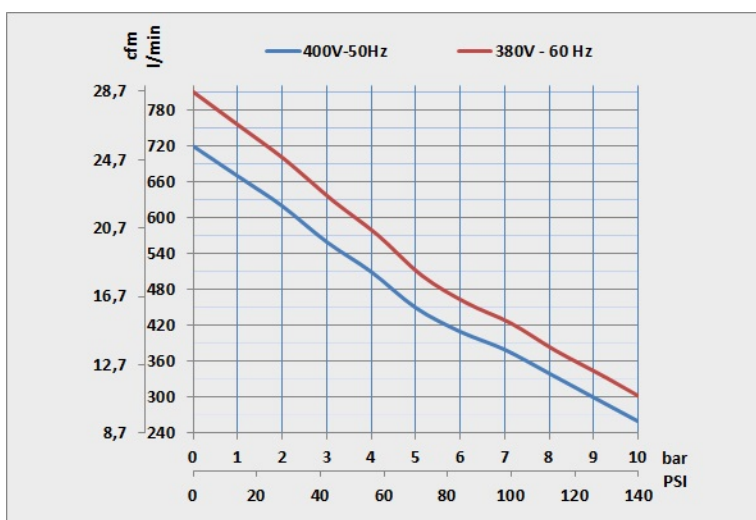
PRIME 6 - 5 kW 400 V-50/60Hz

Cod. GC-1600-PR-3-V

6-cylinder Oil-free compressor, 1,450 rpm, flow rate 450 l/min@5 bar, maximum absorption 20 A. Silent and compact.

								
Air capacity	FAD @ max p	Motor	Voltage Hz	Noise Level	Duty Cycle	max P.	Size	net Weight
m ³ /min 0.72	l/min 720	m ³ /min 0.45	l/min 450	kW 5	400V 50/60Hz	db(A) 76	100 %	bar 10
							mm 804x336x350	Kg 60

Air delivery performance



Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
		Extraordinary	4.000h/4y