














PRIME 2 - 1,5 kW 230 V-50 Hz

Cod. GC-1200-PR-V

Two-cylinder dry compressor, 1,360 rpm, flow rate 170 l/min@5 bar, maximum absorption 7 A. - Can also be used for intensive use - Available in three-phase version, 115V-60Hz and 230V-60Hz - Maximum pressure up to 7 bar - Maximum silence

Cod.	 Air capacity	 FAD F _{ad} @ 5bar	 Motor	 Voltage Hz	 Noise Level	 RPM	 Duty Cycle	 max P.	 Size	 net Weight
PRIME 2 - 230/50 GC-1200-PR-V	m ³ /min/l/min 0.24 240	m ³ /min l/min 0.17 170	kW 1.5	230V 50Hz	db(A) 66	1360	70 %	bar 8	mm 500X350X270	Kg 25
PRIME 2 - 1,5 KW 220 V-60 HZ GC-1200-PR-60-V	m ³ /min/l/min 0.28 280	m ³ /min l/min 0.17 170	kW 1.5	220V 60Hz	db(A) 66	1760	70 %	bar 8	mm 500X350X270	Kg 25
PRIME 2 - 1,5 KW 400 V-50/60 HZ GC-1200-PR-400-V	m ³ /min/l/min 0.24 240	m ³ /min l/min 1.47 1470	kW 1.5	400V 50/60Hz	db(A) 66	1470	70 %	bar 8	mm 500X350X270	Kg 25
PRIME 2 VERSIONE UL - 1,5 KW 220 V - 60 HZ GC-1200-PR-60-UL-V	m ³ /min/l/min 0.28 280	m ³ /min l/min 0.17 170	kW 1.5	220V 60Hz	db(A) 66	1700	70 %	bar 8	mm 500X350X270	Kg 25
PRIME 2 VERSIONE UL - 1,5 KW 110 V-60 HZ GC-1200-PR-110-UL-V	m ³ /min/l/min 0.28 280	m ³ /min l/min 0.185 185	kW 1.5	110V 60Hz	db(A) 66	1700	70 %	bar 8	mm 500X350X270	Kg 25

Air delivery performance

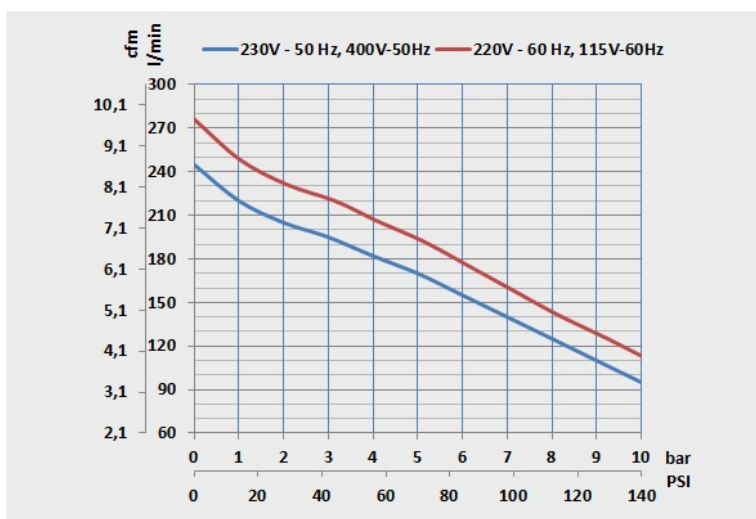

Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
		Extraordinary	4.000h/4y