














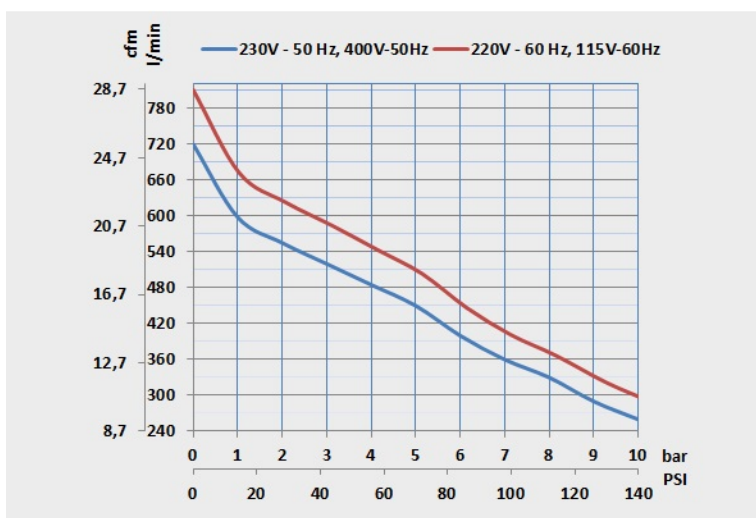
CS 100/50 TANDEM PRIME X3 10 BAR

Cod. PR-CS600-090-SMT3

Oil free compressors silenced version, FAD at 8 bar 316 l/min, tank capacity 90 l. with internal surface treatment against corrosion, equipped with the new membrane air dryer able to warranty -20°C dew point.

										
Air Dryer	Air capacity	FAD @ 8bar	Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.	Size	net Weight
Yes	m³/min l/min 0.72 720	m³/min l/min 0.35 350	kW 4.4	400V 50/60Hz	l 90	db(A) 61	70 %	bar 10	mm 1100x630x820	Kg 119

Air delivery performance



Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.500h/2y
		Extraordinary	4.000h/4y