














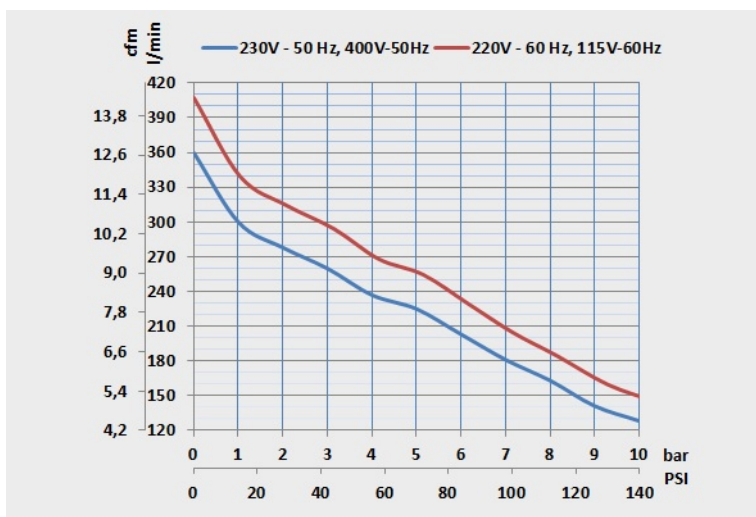
50/25 PRIME X3 10 BAR

Cod. PR-0F300-050-SM-400

Super silent oil free compressor triphase version, max pressure 10 bar, FAD at 8 bar 158 l/min, tank capacity 50 lt, with membrane air dryer, able to provide a dew point value till -20°C. This compressor is developed to provide till 125 l/min at 8 bar at 100% duty cycle (continuously)

										
Air Dryer	Air capacity	FAD @ 8bar	Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.	Size	net Weight
Yes	m³/min 0.05 l/min 50	m³/min 0.18 l/min 180	kW 2.2	400V 50/60Hz	l 40	db(A) 69	70 %	bar 10	mm 710x410x810	Kg 59

Air delivery performance



Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.500h/2y
		Extraordinary	4.000h/4y