












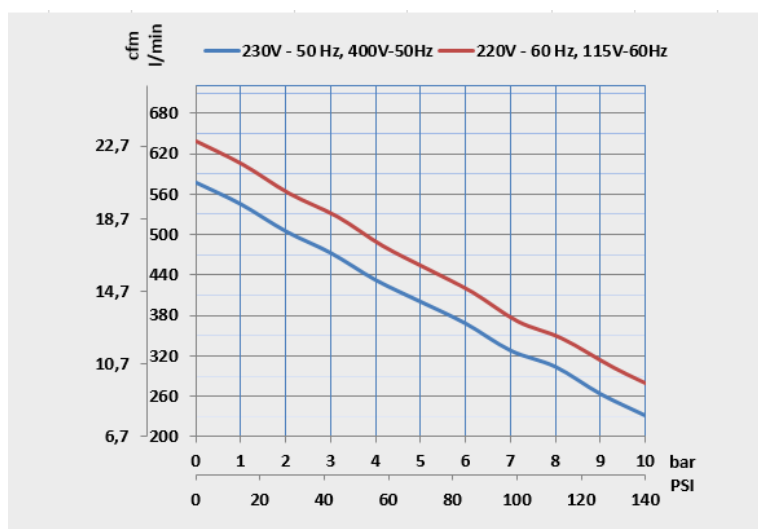
100/50 TANDEM PRIME E

Cod. PR-OF600-090-T3-AN

Oil free compressors, FAD at 5 bar 450 l/min, tank capacity 90 L. with internal surface treatment against corrosion, equipped with the new adsorption air dryer able to warranty till -40°C dew point value. This compressor can be set up to 10 bar! Compressed air quality in conformity with the ISO 8573-1 (class 2-1-1) and the European Pharmacopeia in matter of medical air.

|  |  |  |  |  |  |  |  |  | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Air Dryer | Air capacity | FAD @ 8bar | Motor | Voltage Hz | Receiver | Noise Level | Duty Cycle | max P. | Size | net Weight |
| Yes | m ³ /min l/min 0.72 720 | m ³ /min l/min 0.35 350 | kW 4.4 | 400V 50/60Hz | l 90 | db(A) 69 | 100 % | bar 10 | mm 1230x630x820 | Kg 128 |

Air delivery performance



Maintenance kits

| Kit. | Description | Type | Hours |
|------|-------------|---------------|-----------|
| | | Ordinary | 1.500h/2y |
| | | Extraordinary | 4.000h/4y |