














## CS 100/50 TANDEM PRIME E


**Cod. PR-CS600-090-T3-AN**

Model with acoustic cabin, new generation desiccant dryer capable of supplying dried air down to -40 °C dew point, the top of the MGF range. Super silenced oil-free compressor, flow rate 450 l/min @ 5 bar, 40 lt tank. This model is also available in 10 BAR configuration. Air quality compliant with ISO 8573-1 (classes 2-1-1) and European Pharmacopeia in matter of medical air.

Medical Device CE 0425

 Air Dryer	 Air capacity	 FAD <small>Fad @ 5bar</small>	 Motor	 Voltage Hz	 Receiver	 Noise Level	 Duty Cycle	 max P.	 Size	 net Weight
Yes	m³/min    l/min 0.72        720	m³/min    l/min 0.45        450	kW 2.2	400V 50/60Hz	l 90	db(A) 56	100 %	bar 10	mm 1245 x 725 x 1020	Kg 230

## Air delivery performance

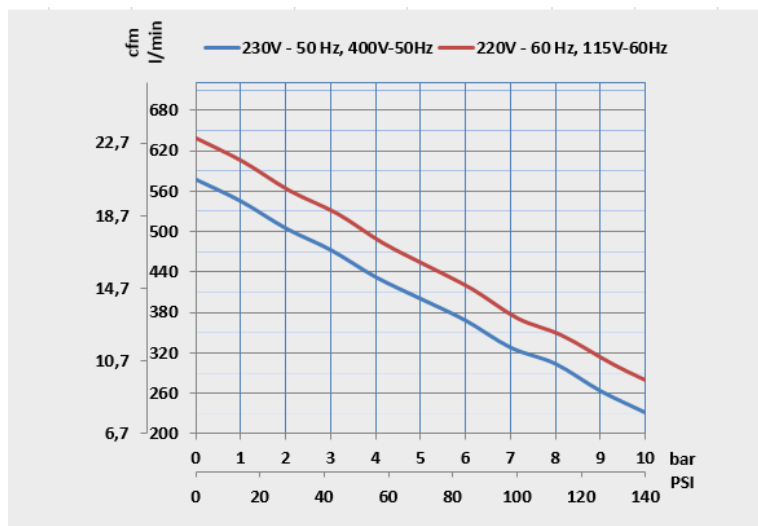

## Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
		Extraordinary	4.000h/4y