














## PRIME 1 - 0,75 kW 230 V-50Hz

**Cod. GC-1100-PR-V**

Compressore a secco monocilindrico, 1.320 giri, portata 85 l/min@5 bar, assorbimento massimo 7 A. Utilizzabile anche per impiego intensivo. Massima silenziosità

Cod.	 Air capacity	 FAD Fad @ 5bar	 Motor	 Voltage Hz	 Noise Level	 RPM	 Duty Cycle	 max P.	 Size	 net Weight
PRIME 1 - 230/50 GC-1100-PR-V	m³/min/l/min 0.12 120	m³/min l/min 0.085 85	kW 0.75	230V 50Hz	db(A) 65	1320	70 %	bar 8	mm 390x190x270	Kg 16,5
PRIME 1 - 0.75 KW 220V-60HZ GC-1100-PR-60-V	m³/min/l/min 0.14 140	m³/min l/min 0.095 95	kW 0.75	220V 60Hz	db(A) 65	1760	70 %	bar 8	mm 390x190x270	Kg 16.5
PRIME 1 VERSIONE UL- 0,75 KW 220V-60HZ GC-1100-PR-60-UL-V	m³/min/l/min 0.14 140	m³/min l/min 0.095 95	kW 0.75	220V 60Hz	db(A) 65	1670	70 %	bar 8	mm 390x190x270	Kg 16,5
PRIME 1 VERSIONE UL - 0,75 KW 110V-60HZ GC-1100-PR-110-UL-V	m³/min/l/min 0.14 140	m³/min l/min 0.095 95	kW 0.75	110V 60Hz	db(A) 65	1670	70 %	bar 8	mm 390x190x270	Kg 16,5

## Air delivery performance

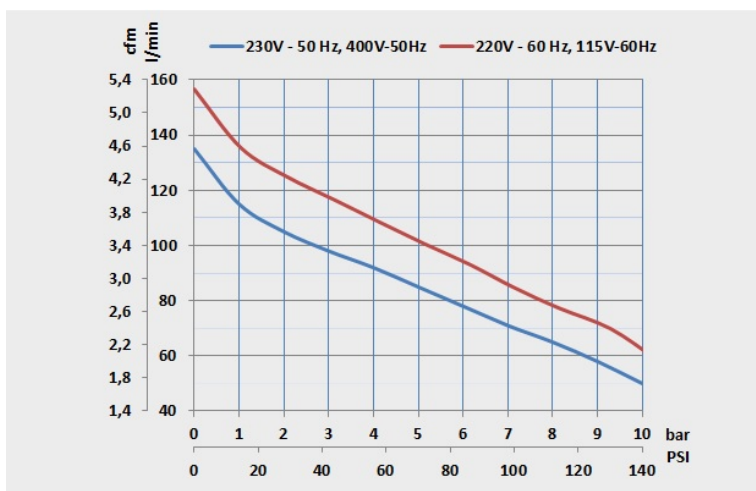

## Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
		Extraordinary	4.000h/4y