




## PRO 500/150 PRIME S HD

**Cod. PR-OF1800-500-T3-HD**

Oil-free compressor, intake air 2,160 l/min, air delivery at 10 bar 1,350 l/min, 500 l tank. The operation of the compressor is regulated by an electronic control unit installed directly on the compressor. The compressor is supplied without air filtration.

Air capacity		FAD @ 8bar		Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.
m³/min	l/min	m³/min	l/min	kW		l	db(A)	%	bar
2.16	2160	1.14	1140	15	400V 50/60Hz	500	79	100 %	10

### Air delivery performance

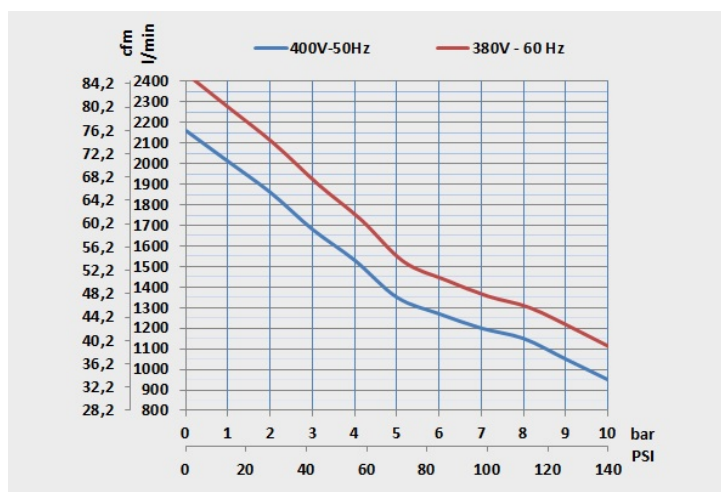

### Maintenance kits

Kit.	Description	Type	Hours
TA-FL-0013-K-SCP	<b>PRIME 5kW+5kW+5kW Versione S</b> Il Kit manutenzione ordinaria PRIME 5kW+5kW+5kW Versione S comprende: filtro di aspirazione, cartuccia filtro di linea, O-ring e pastiglia per valvola di ritenuta.	Ordinary	1.000h/1y
		Extraordinary	4.000h/4y