



500/150 PRIME S











Cod. PR-OF1800-500-T3

Oil free reciprocating air compressors with a compressed air FAD of 1350 l/min @ 5 bar pressure. Receiver capacity 500 L, with internal surface treatment to protect against corrosion. This compressor is available also in **10 BAR VERSION**, visit the appropriate section!


 Maximum simultaneous use: 18

 Dental Chairs: 20

Medical Device CE 0425

Air Dryer										
Air capacity	FAD	Fad @ 5bar	Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.	Size	net Weight
No	m ³ /min 2.16 l/min 2160	m ³ /min 1.35 l/min 1350	kW 15	400V 50Hz	l 500	db(A) 83	80 %	bar 8	mm 1980x780x1050	Kg 330

Air delivery performance

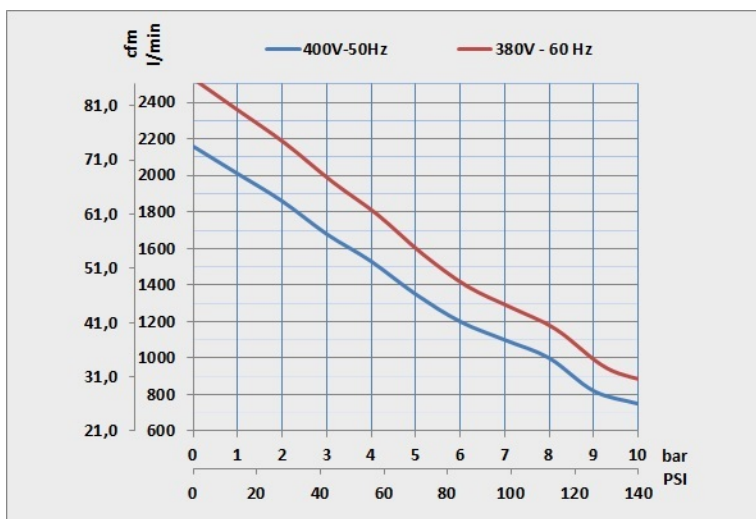

Maintenance kits

Kit.	Description	Type	Hours
TA-FL-0013-K-SCP	PRIME 5kW+5kW+5kW Versione S Il Kit manutenzione ordinaria PRIME 5kW+5kW+5kW Versione S comprende: filtro di aspirazione, cartuccia filtro di linea, O-ring e pastiglia per valvola di ritenuta.	Ordinary	1.000h/1y
		Extraordinary	4.000h/4y