














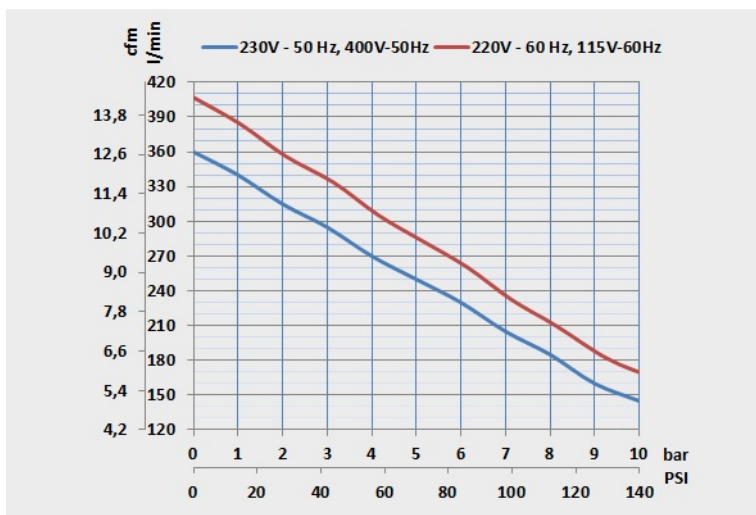
50/25 PRIME S HD 10 BAR

Cod. PR-OF300-040-HD

Oil-free compressor, 3 cylinders, flow rate 250 l/min@5 bar, 40 l tank, without dryer. Suitable for intensive cycle operation.

|  |  |  |  |  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|---|---|---|---|
| Air Dryer | Air capacity | FAD @ 8bar | Motor | Voltage Hz | Receiver | Noise Level | Duty Cycle | max P. | Size | net Weight |
| No | m³/min l/min 0.36 360 | m³/min l/min 0.19 190 | kW 2.2 | 230V 50Hz | l 40 | db(A) 69 | 100 % | bar 10 | mm 600x410x810 | Kg 54 |

Air delivery performance



Maintenance kits

| Kit. | Description | Type | Hours |
|------|-------------|---------------|-----------|
| | | Ordinary | 1.500h/2y |
| | | Extraordinary | 4.000h/4y |

Images

