














50/25 PRIME S HD 10 BAR

Cod. PR-OF300-040-400-HD

Oil-free compressor, 3 THREE-PHASE cylinders, flow rate 250 l/min@5 bar, 40 l tank, without dryer. Suitable for intensive cycle operation.

Air Dryer										
	Air capacity	FAD @ 8bar	Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.	Size	net Weight
No	m ³ /min 0.36 l/min 360	m ³ /min 0.19 l/min 190	kW 2.2	400V 50/60Hz	l 40	db(A) 69	100 %	bar 10	mm 600x410x810	Kg 54

Air delivery performance

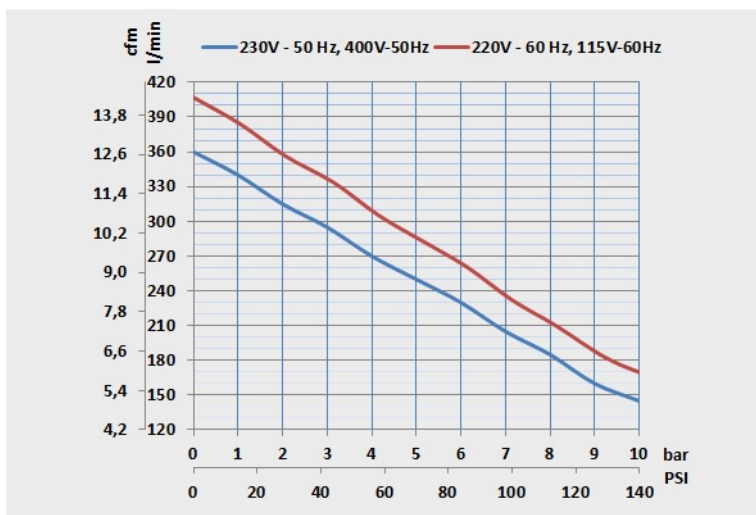

Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.500h/2y
		Extraordinary	4.000h/4y

Images

