














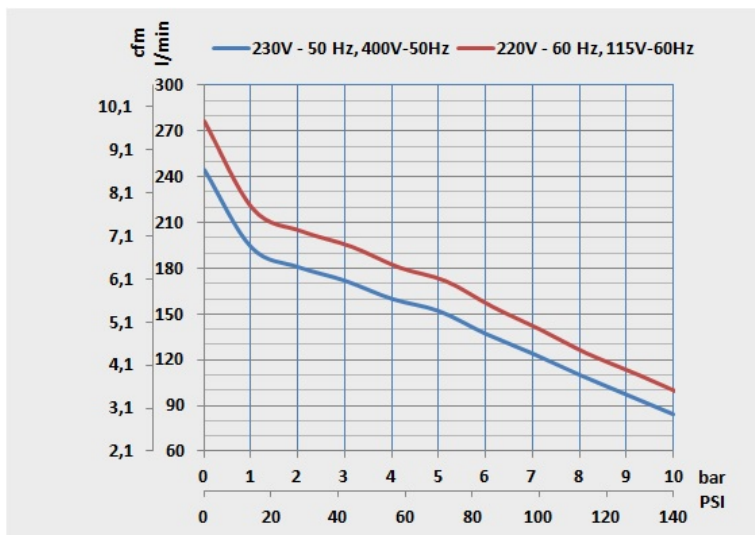
50/15 PRIME M HD

Cod. PR-OF200-040-M-HD

Oil-free compressor, 2 cylinders, flow rate 152 l/min@5 bar, 40 lt. tank, new generation membrane dryer capable of supplying dry air down to -20°C dew point

										
Air Dryer	Air capacity	FAD @ 8bar	Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.	Size	net Weight
Yes	m³/min l/min 0.255 255	m³/min l/min 0.11 110	kW 1.5	230V 50Hz	l 40	db(A) 69	100 %	bar 10	mm 710x410x770	Kg 50

Air delivery performance



Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.500h/2y
		Extraordinary	4.000h/4y