



## CS 50/25 PRIME E

**Cod. PR-CS300-040-AN**

Model with acoustic cabin, new generation desiccant dryer capable of supplying dried air down to -40 °C dew point, the top of the MGF range. Super silenced oil-free compressor, flow rate 225 l/min @ 5 bar, 40 lt tank. This model is also available in 10 BAR configuration. Air quality compliant with ISO 8573-1 (classes 2-1-1) and European Pharmacopeia in matter of medical air.


 Maximum simultaneous use: 3

 Dental Chairs: 4

Medical Device CE 0425

Air Dryer	Air capacity	FAD F <sub>ad</sub> @ 5bar	Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.	Size	net Weight
Yes	m <sup>3</sup> /min l/min 0.36 360	m <sup>3</sup> /min l/min 0.225 225	kW 2.2	230V 50Hz	l 40	db(A) 53	100 %	bar 10	mm 720x490x970	Kg 103

## Air delivery performance

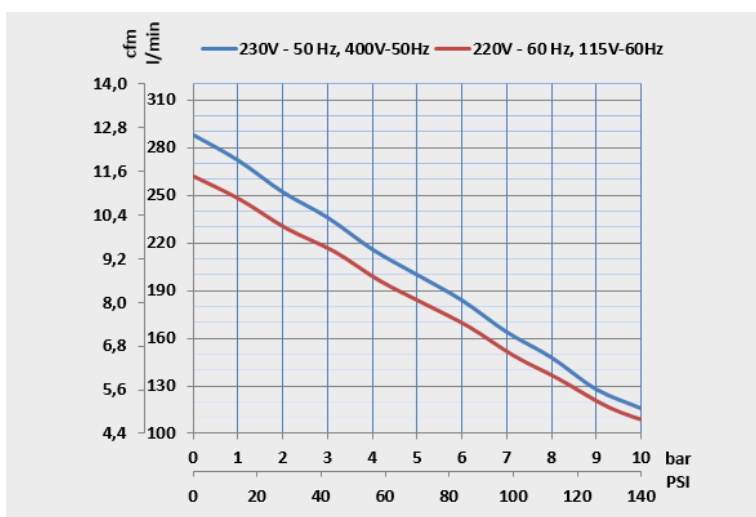

## Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
		Extraordinary	4.000h/4y