



CS 50/25 PRIME M

Cod. PR-CS300-040-M


Oil free reciprocating air compressors with soundproof cabinet, 3 cylinders, with a compressed air FAD of 225 l/min @ 5 bar pressure. Receiver capacity 40 L, with internal surface treatment to protect against corrosion. Complete with membrane dryer to ensure maximum air purity. This compressor is available also in [10 BAR VERSION](#), visit the appropriate section!

 Maximum simultaneous use: 3

 Dental Chairs: 4

Cod.	Air Dryer	Air capacity	FAD FAD @ 5bar	Motor	Voltage Hz	Receiver	Noise Level	RPM	Duty Cycle	max P.	Size	net Weig
CS 50/25 PRIME M PR-CS300-040-M	Yes	m³/min/l/min 0.36 360	m³/min l/min 0.225 225	kW 2.2	230V 50Hz	l 40	db(A) 53	1350	70 %	bar 7	mm 720x490x890	Kg 106
CS 50/25 PRIME M PR-CS300-040-M-400	Yes	m³/min/l/min 0.36 360	m³/min l/min 0.225 225	kW 2.2	400V 50Hz	l 40	db(A) 53	1470	70 %	bar 7	mm 720x490x890	Kg 106
CS 50/25 PRIME M 220V - 60Hz PR-CS300-040-M-6	Yes	m³/min/l/min 0.42 420	m³/min l/min 0.243 243	kW 2.2	220V 60Hz	l 40	db(A) 53	1800	70 %	bar 7	mm 720x490x890	Kg 106

Air delivery performance

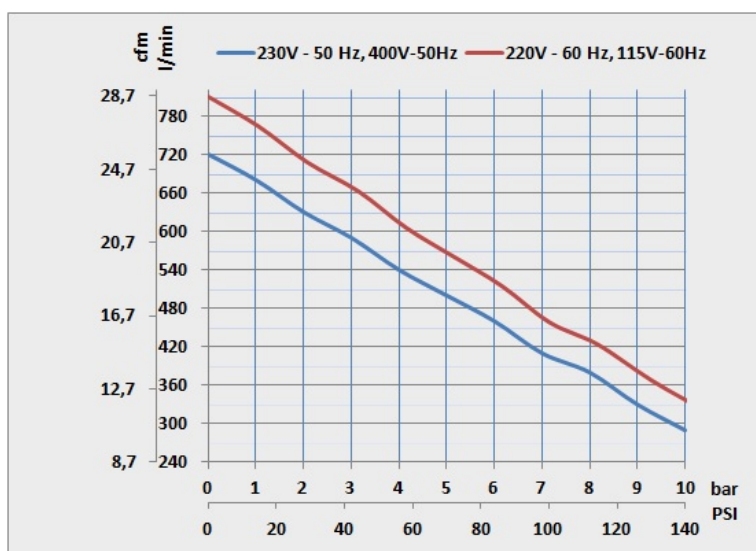

Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
		Extraordinary	4.000h/4y