



CS 30/15 PRIME M












Cod. PR-CS200-040-M

Oil free reciprocating air compressors with soundproof cabinet, 2 cylinders, with a compressed air FAD of 170 l/min @ 5 bar pressure. Receiver capacity 40 L, with internal surface treatment to protect against corrosion. Complete with membrane dryer to ensure maximum air purity. This compressor is available also in **10 BAR VERSION**, visit the appropriate section!


 Maximum simultaneous use: 2

 Dental Chairs: 3

Medical Device CE 0425

Cod.	Air Dryer	 Air capacity	 FAD FAD @ 5bar	 Motor	 Voltage Hz	 Receiver	 Noise Level	 RPM	 Duty Cycle	 max P.	 Size	 net Weig
CS 30/15 PRIME M PR-CS200-040-M	Yes	m³/min/l/min 0.23 230	m³/min l/min 0.17 170	kW 1.5	230V 50Hz	l 40	db(A) 53	1360	70 %	bar 7	mm 490x720x890	Kg 94
CS 30/15 PRIME M PR-CS200-040-M-400	Yes	m³/min/l/min 0.23 230	m³/min l/min 0.17 170	kW 1.5	400V 50Hz	l 40	db(A) 53	1470	70 %	bar 7	mm 490x720x890	Kg 94
CS 30/15 PRIME M 220V - 60Hz PR-CS200-040-M-6-UL	Yes	m³/min/l/min 0.28 280	m³/min l/min 0.185 185	kW 1.5	220V 60Hz	l 40	db(A) 53	1760	70 %	bar 7	mm 490x720x890	Kg 94
CS 30/15 PRIME M 110V - 60Hz PR-CS200-040-M-110	Yes	m³/min/l/min 0.28 280	m³/min l/min 0.185 185	kW 1.5	110V 60Hz	l 40	db(A) 53	1760	70 %	bar 7	mm 490x720x890	Kg 94

Air delivery performance

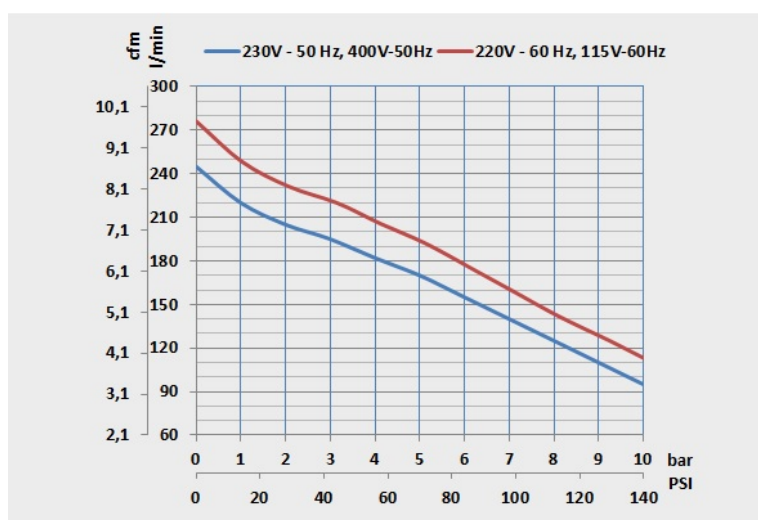

Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
		Extraordinary	4.000h/4y