














24/5 GENESIS S

Cod. D-GE075-024-6


Oil-free compressor, FAD 85 l/min@5 bar, 24 L tank, without dryer.

 Maximum simultaneous use: 1

 Dental Chairs: 1

Air Dryer											
No	Air capacity	FAD Fad @ 5bar	Motor	Voltage Hz	Receiver	Noise Level	RPM	Duty Cycle	max P.	Size	net Weight
No	m³/min l/min 0.156 156	m³/min l/min 0.085 85	kW 0.55	220V 60Hz	l 24	db(A) 65	1700	50 %	bar 7	mm 430x400x600	Kg 33

Air delivery performance

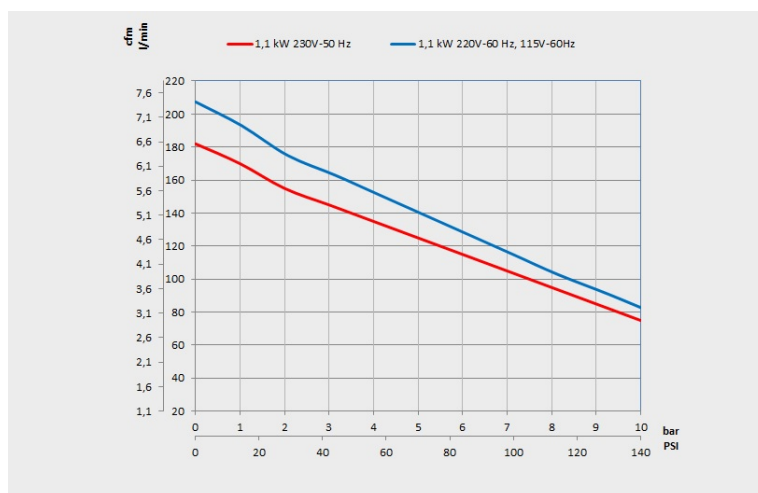

Maintenance kits

Kit.	Description	Type	Hours
TA-FL-001-K	GENESI S ordinary maintenance kit Ordinary maintenance kit for GENESI compressors, versions without dryer. The kit consists of the line filter cartridge (if present) and the pumping element suction filter. Annual replacement of kit components is recommended. Maintenance operations can be performed at a higher frequency if the environment in which the compressor works is particularly dirty.	Ordinary	1.000h/1y

Kit.	Description	Type	Hours
MG-GC-011-K	<p>Extra ordinary maintenance kit for GENESI S and M versions</p> <p>The GENESI extraordinary maintenance spare parts kit includes: a suction filter, two elastic rings, O-rings, a line filter cartridge and two complete valve plates. The recommended maintenance intervals for this compressor are 1500 hours / 2 years. Maintenance operations can be performed at a higher frequency if the environment in which the compressor works is particularly dirty.</p>	Extraordinary	1.500h/2y