

270/100 TANDEM PRIME S HD 10 BAR

Cod. PR-OF1200-270-T3-HD

Oil free compressor for an intensive work cycle, 12 cylinders, air output 760 l/min@8 bar, 260 liter tank, without dryer. Also for continuous cycle operation.




Applications:

- Dental clinics
- Dental laboratories and CAD-CAM milling machines
- Laboratories: rheometers, viscometers, chromatography, analyzers
- Ophthalmology
- Sterilization devices
- Air breathing systems
- Endoscopy cabinets
- Food packaging
- Beverages
- Gas production
- Fire sprinkler systems

Air Dryer	FAD @ 8bar		Motor	Voltage Hz	Receiver	Noise Level	Duty Cycle	max P.	Size	net Weight
No	m ³ /min 0.76	l/min 760	kW 8	400V 50/60Hz	l 260	db(A) 86	100 %	bar 10	mm 1560x810x1030	Kg 220

Air delivery performance

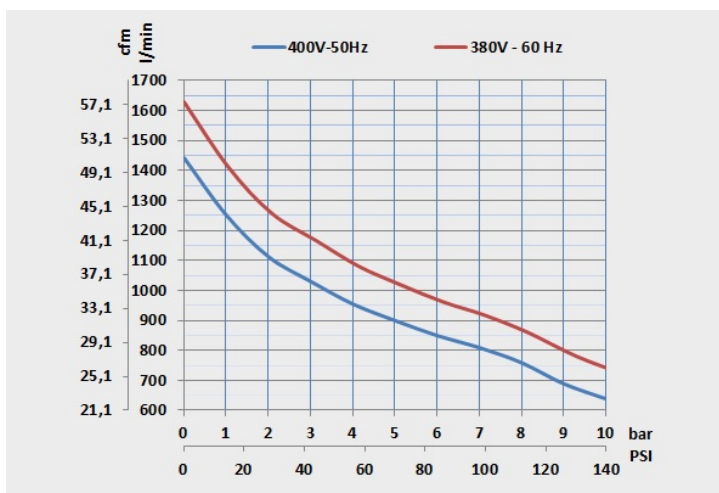

Maintenance kits

Kit.	Description	Type	Hours
TA-FL-0012-K-SCP	<p>PRIME 6 S and TANDEM 2 + 2, 3 + 3 S kit</p> <p>Replacement kit for routine maintenance 200/50 PRIME S and TANDEM 2+2, 3+3 S versions (cartridges+suction filter).</p> <p>Comprehends:</p> <ul style="list-style-type: none"> • 6 suction filters, code: TA-FL-058-C • 2 non-return valve pads, cod: CO-PV-001 • 1 o-ring for filters, cod. TA-FL-085-OR • 1 filter cartridge, code: TA-FL-001-C-SM <p>Replace the filtration cartridges annually.</p>	Ordinary	1.000h/1y
PR-GC-037-K-SCP	<p>TANDEM PRIME 6+6</p> <p>The extraordinary maintenance kit for TANDEM PRIME 6+6 (270/100 TANDEM PRIME).</p> <p>comprehends:</p> <ul style="list-style-type: none"> • 12 suction filters, code: TA-FL-058-C • 24 O-rings, code: MA-PC018 • 12 piston rings , code: MA-MG00001 • 12 piston guide rings, code: MA-MG00003 • 12 expansion rings for the segments, code: MA-MG00024 • 12 complete valve plates, code: MA-MG-02002P-C-P • 4 non-return valve pads, cod: CO-PV-001 	Extraordinary	4.000h/4y