



CS 30/15 PRIME S

Cod. PR-CS200-040

Oil free reciprocating air compressors with soundproof cabinet, 2 cylinders, with a compressed air FAD of 170 l/min @ 5 bar pressure. Receiver capacity 40 L, with internal surface treatment to protect against corrosion. This compressor is available also in [10 BAR VERSION](#), visit the appropriate section


 Maximum simultaneous use: 2

 Dental Chairs: 3

Medical Device CE 0425

| Cod. | Air Dryer | Air capacity | FAD FAD @ 5bar | Motor | Voltage Hz | Receiver | Noise Level | RPM | Duty Cycle | max P. | Size | net Weigh |
|---|-----------|--------------------------|---------------------------|-----------|--------------|----------|-------------|------|------------|----------|-------------------|-----------|
| CS 30/15 PRIME S PR-CS200-040 | No | m³/min/l/min 0.23 230 | m³/min l/min 0.17 170 | kW 1.5 | 230V 50Hz | l 40 | db(A) 53 | 1360 | 70 % | bar 7 | mm 490x720x890 | Kg 94 |
| CS 30/15 PRIME S PR-CS200-040-400 | No | m³/min/l/min 0.23 230 | m³/min l/min 0.17 170 | kW 1.5 | 400V 50Hz | l 40 | db(A) 53 | 1470 | 70 % | bar 7 | mm 490x720x890 | Kg 94 |
| CS 30/15 PRIME S 220V - 60Hz PR-CS200-040-6 | Yes | m³/min/l/min 0.28 280 | m³/min l/min 0.185 185 | kW 1.5 | 220V 60Hz | l 40 | db(A) 53 | 1760 | 70 % | bar 7 | mm 490x720x890 | Kg 94 |
| CS 30/15 PRIME S 110V - 60Hz PR-CS200-040-110-UL | Yes | m³/min/l/min 0.28 280 | m³/min l/min 0.185 185 | kW 1.5 | 110V 60Hz | l 40 | db(A) 53 | 1760 | 70 % | bar 7 | mm 490x720x890 | Kg 94 |

Air delivery performance

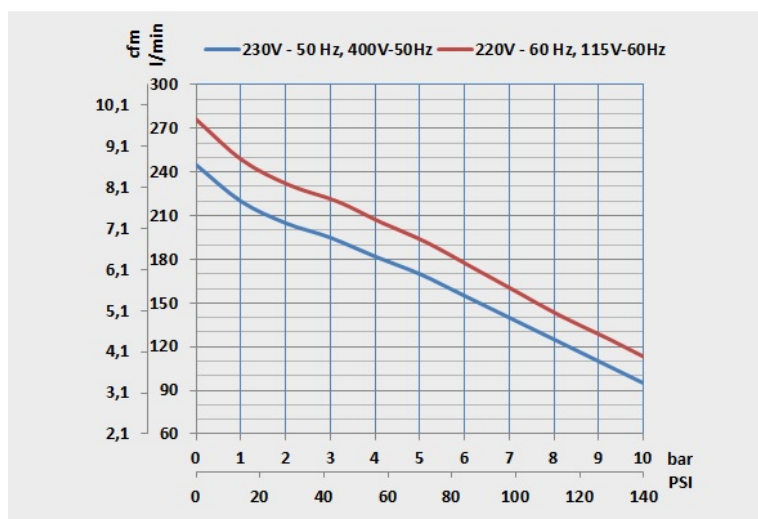

Maintenance kits

| Kit. | Description | Type | Hours |
|------|-------------|---------------|-----------|
| | | Ordinary | 1.000h/1y |
| | | Extraordinary | 4.000h/4y |