



## 50/15 PRIME S












**Cod. PR-0F200-040**

Oil free reciprocating air compressors, 2 cylinders, with a compressed air FAD of 170 l/min @ 5 bar pressure. Receiver capacity 40 L, with internal surface treatment to protect against corrosion. This compressor is available also in **10 BAR VERSION**, visit the [appropriate section!](#)


 Maximum simultaneous use: 2

 Dental Chairs: 3

Medical Device CE 0425

Cod.	Air Dryer	 Air capacity	 FAD <small>Fad @ 5bar</small>	 Motor	 Voltage Hz	 Receiver	 Noise Level	 RPM	 Duty Cycle	 max P.	 Size	 net Weight
50/15 PRIME S PR-0F200-040	No	m <sup>3</sup> /min/l/min 0.255 255	m <sup>3</sup> /min l/min 0.17 170	kW 1.5	230V 50Hz	l 40	db(A) 66	1360	70 %	bar 7	mm 600x410x770	Kg 46
50/15 PRIME S PR-0F200-040-400	No	m <sup>3</sup> /min/l/min 0.255 255	m <sup>3</sup> /min l/min 0.17 170	kW 1.5	400V 50/60Hz	l 40	db(A) 66	1470	70 %	bar 7	mm 600x410x770	Kg 46
50/15 PRIME S 220V - 60Hz PR-0F200-040-6	No	m <sup>3</sup> /min/l/min 0.28 280	m <sup>3</sup> /min l/min 0.185 185	kW 1.5	220V 60Hz	l 40	db(A) 66	1760	70 %	bar 7	mm 600x410x770	Kg 46
50/15 PRIME S 110V - 60Hz PR-0F200-040-110	No	m <sup>3</sup> /min/l/min 0.28 280	m <sup>3</sup> /min l/min 0.185 185	kW 1.5	110V 60Hz	l 40	db(A) 66	1760	70 %	bar 7	mm 600x410x770	Kg 46

## Air delivery performance

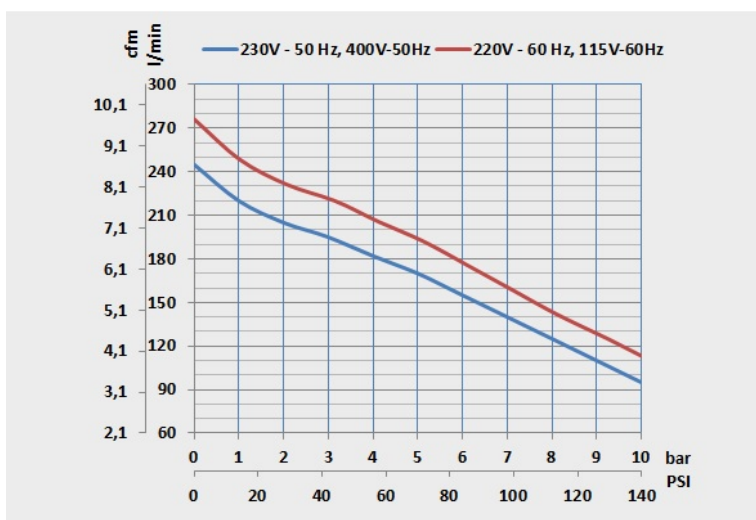

## Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
		Extraordinary	4.000h/4y