



CS 100/50 TANDEM PRIME S

Cod. PR-CS600-090-T












Oil free reciprocating air compressors with soundproof cabinet with a compressed air FAD of 500 l/min @ 5 bar pressure. Receiver capacity 90 L, with internal surface treatment to protect against corrosion.

This compressor is available also in [10 BAR VERSION](#), visit the [appropriate section!](#)


 Maximum simultaneous use: 6

 Dental Chairs: 8

Medical Device CE 0425

Cod.	Air Dryer	 Air capacity	 FAD FAD @ 5bar	 Motor	 Voltage Hz	 Receiver	 Noise Level	 RPM	 Duty Cycle	 max P.	 Size	 net weight
CS 100/50 TANDEM PRIME S PR-CS600-090-T	No	m³/min/l/min 0.72 720	m³/min l/min 0.5 500	kW 4.4	230V 50Hz	l 90	db(A) 56	1350	70 %	bar 7	mm 725X1245X1020	Kg 220
CS 100/50 TANDEM PRIME S PR-CS600-090-T3	No	m³/min/l/min 0.72 720	m³/min l/min 0.5 500	kW 4.4	400V 50Hz	l 90	db(A) 56	1470	70 %	bar 7	mm 725X1245X1020	Kg 220

Air delivery performance

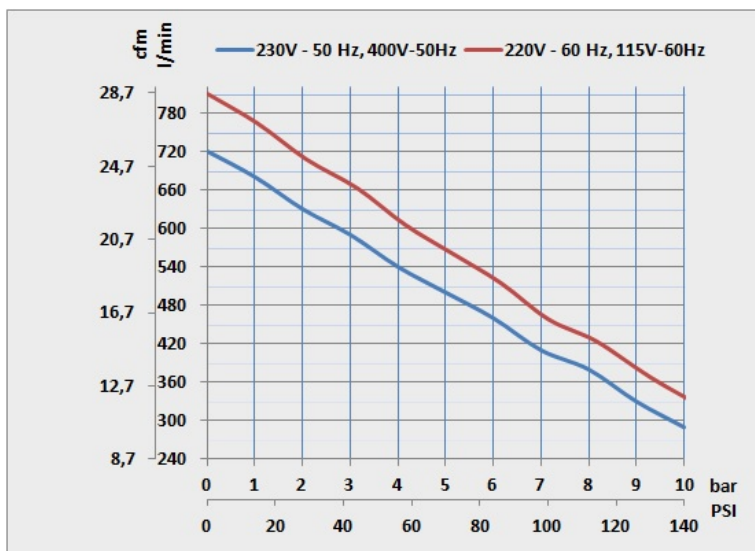

Maintenance kits

Kit.	Description	Type	Hours
		Ordinary	1.000h/1y
		Extraordinary	4.000h/4y